

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : G01N 33/58, C12Q 1/00, G01N 33/543		A1	(11) International Publication Number: WO 99/64867
		(43) International Publication Date: 16 December 1999 (16.12.99)	
(21) International Application Number: PCT/GB98/03727		(81) Designated States: CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 3 December 1998 (03.12.98)		Published With international search report.	
(30) Priority Data: 97309784.3 10 June 1998 (10.06.98) EP			
(71) Applicant (for all designated States except US): AMERSHAM PHARMACIA BIOTECH UK LIMITED [GB/GB]; Amersham Place, Little Chalfont, Buckinghamshire HP7 9NA (GB).			
(72) Inventor; and (75) Inventor/Applicant (for US only): THOMAS, Nicholas [GB/GB]; 12 Mapletree Close, Radyr, Cardiff, South Glamorgan CF4 8RU (GB).			
(74) Agents: PENNANT, Pyers et al.; Stevens Hewlett & Perkins, 1 Serjeants' Inn, Fleet Street, London EC4Y 1LL (GB).			

(54) Title: MULTIPLE ASSAY METHOD

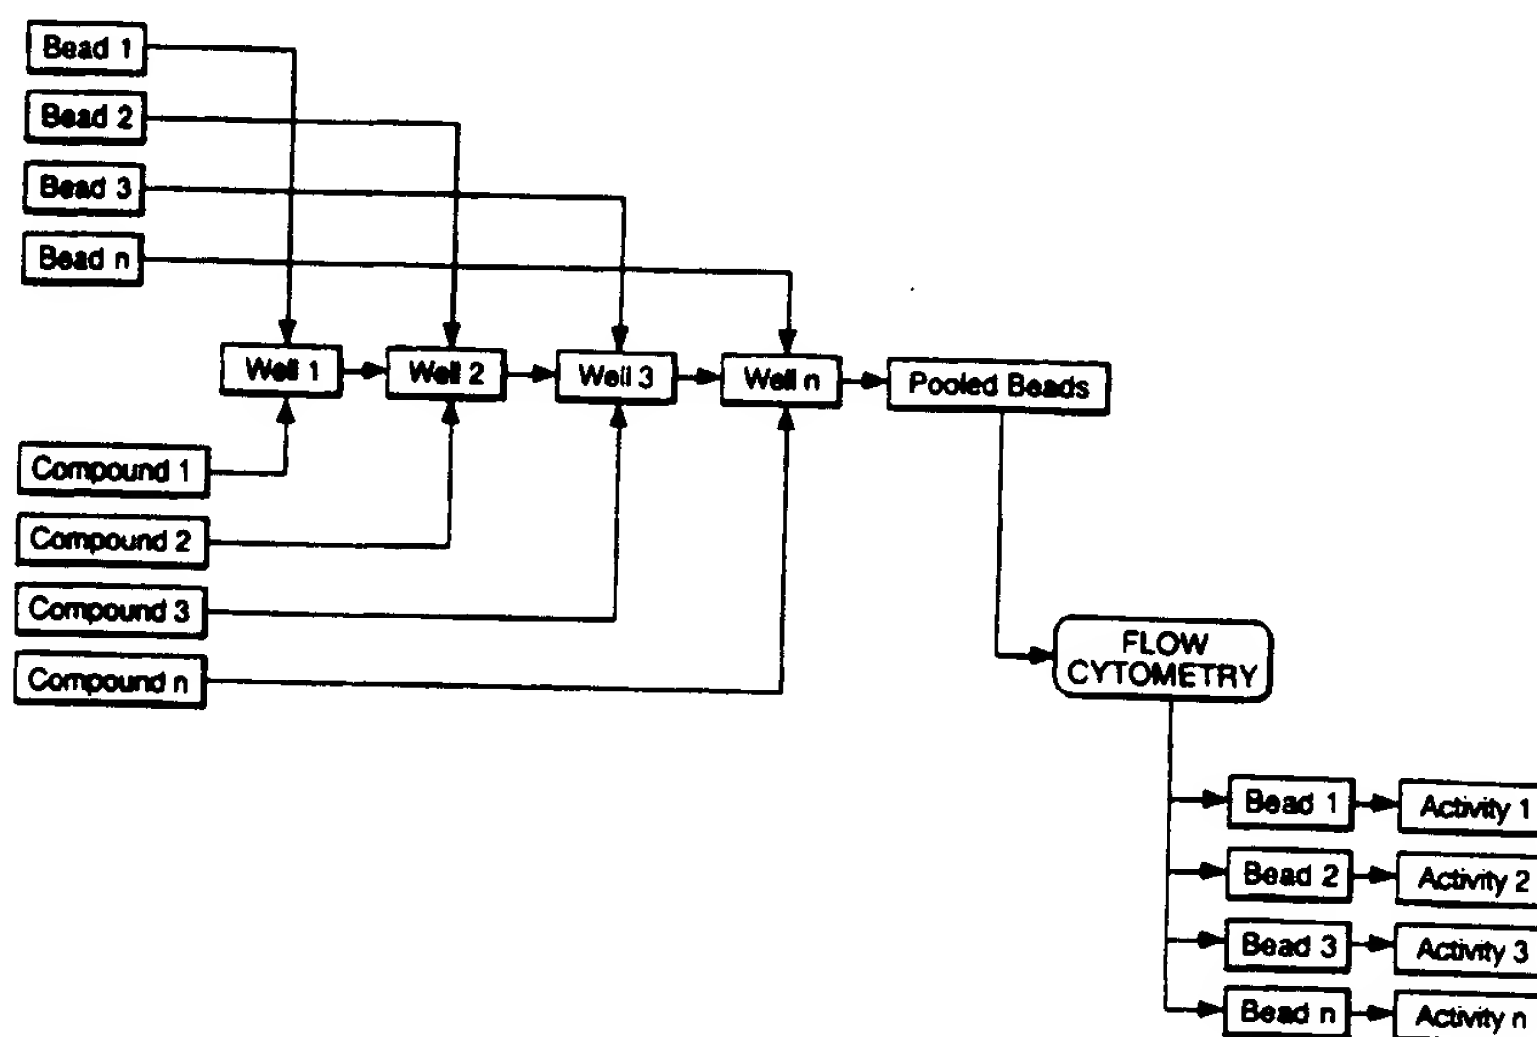

(57) Abstract

A method for the assay of N samples each containing a compound to be tested, comprises providing N reaction vessels each containing a population of carrier beads and other reagents for performing the assay, where N is at least 2 e.g. 80-4000. Each population of carrier beads is distinguishable from every other population. After adding the samples to the reaction vessels and performing the assays, the contents of all the reaction vessels are mixed and subjected to analysis by flow cytometry. By means of flow cytometry, each carrier bead is rapidly analysed to identify its population and also to determine the presence or concentration or biological activity of the compound to be tested.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

### MULTIPLE ASSAY METHOD

5           This invention relates to a multiple assay method suitable for performing high-throughput screening for drug discovery and specifically to a procedure which provides for large-scale parallel processing and analysis of results from many thousands of separate biological assays.

          The process of high-throughput screening (HTS) is central to  
10   the objectives of the pharmaceutical industry, i.e. to discover, develop and market new drugs (Lutz *et al*, (1996) Drug Discovery Today, 1(7), 277-86). In the HTS process, drug candidates are screened for possible effects in biological systems. Increasingly, there is a drive to test larger numbers of compounds in each screen, and screening assays examining 100,000  
15   compounds or more are typical. This requires highly sophisticated robotic automation and instrumentation to achieve efficient levels of throughput. In general, modern screening techniques utilise multiwell plate technologies to allow transfer of the many thousands of assays between the various stages in the procedure. Such plates may contain between 96 and 1536 or  
20   more individual wells, where each well contains the same reagents as all other wells in the screen, except for the individual compounds under test which are each present in only one well. The standard format and layout of the multiwell plates allows fast robotic handling and liquid dispensing devices to be used to maximise throughput.

25           In many HTS applications the rate limiting step occurs in assay analysis at the stage of detecting and measuring the signal from the label used in the assay. This step is a serial process, each well of the multiwell plate being measured in turn. Such measurements typically require from one to several seconds to perform, with the consequence that  
30   the time taken to analyse a multiwell plate can be considerable.

Flow Cytometry (Parks, D.R. and Herzenberg, L.A. 1984, Methods in Enzymology 108. 197-241) is a technique for analysing cells or particles according to their size and fluorescence. The cells or particles are carried by a thin rapidly moving stream of liquid which is transected by  
5 light beam(s) from one or more lasers or other light sources. Photo-detectors register light-scattering and fluorescence arising from a cell or particle passing through a light beam and the resulting electronic signals are processed to yield analytical data. In contrast to the slow data acquisition time of multiwell plate readers, instrumentation for flow  
10 cytometry enables very rapid analysis of many thousands or millions of cells or other particles in a high speed stream of liquid and is typified by very fast measurement times, for example of the order of 1 $\mu$ sec/event.

Flow cytometry has other characteristics which make it favourable for analysis in HTS. Firstly, the very small analysis volumes  
15 required are compatible with the current trend to scale down assays as a means of increasing throughput. Secondly, flow cytometry is inherently an homogeneous measurement system, i.e. measurement of the fraction of a specific fluorescent dye-labelled ligand in a particular state can be accomplished without the need to physically separate that type of  
20 fluorescent dye from the total type. In HTS applications, this is a desirable property as it removes the need for washing or separation stages to isolate the desired type of label prior to measurement. Flow cytometry has been extensively used for diagnostic assays to measure a wide range of analytes in blood and other biological fluids, for example in immunotyping  
25 and measurement of cell surface antigens associated with HIV infection (Patterson, B.K. *et al* J. Virology. (1995) 69(7) 4316-4322). Despite its inherent advantages however, flow cytometry is disadvantaged by low throughput rates which are a consequence of serial processing. While read times are very fast, allowing many thousands of events to be  
30 analysed/second within a single assay, there is a considerable delay

between samples which currently limits overall throughput to <100 separate analyses/hour.

A desire to have a higher throughput in these applications has led to the development of multiplex methods which allow more than one analyte to be measured simultaneously by flow cytometry. Multiplexing is achieved by carrying out solid phase linked assays using plastic or latex beads as assay substrates. By using a number of discrete bead types which are individually distinguishable from each other, where each bead type carries reagents for one assay, standard flow cytometer instrumentation may be used both to identify the bead type and to measure the assay signal associated with each bead, and therefore to perform several tests in parallel on a single sample, for example to measure the presence of multiple analytes in human sera (McHugh T.M., 1994, *Methods in Cell Biology* 42, 575-595). Discrimination between bead types can be achieved by size (Frengen J. *et al*, 1995, *Journal of Immunological Methods*, Volume 178, p141), by colour or fluorescence (Fulwyler M.J. UK Patent 1,561,042) or by electronic means (Mandecki W. US Patent 5,641,634).

Multiplexing of flow cytometry assays introduces an element of parallel processing into an otherwise serial process, so that while the delay between samples remains as before, the amount of information gathered from each sample is increased several fold giving a resulting increase in data acquisition rates. This is ideal for measurement of multiple analytes in a single sample, i.e. 'one sample, many tests'. However, the requirements of high throughput screening, i.e. 'one test, many samples', are the reverse. In HTS assays it is a requirement that there must always be separation of assays to allow the effects of individual compounds within the screen to be determined. Consequently, methods previously described for multiplex diagnostic analyses by flow cytometry are not applicable to HTS assays.

This invention provides a method for the assay of N samples each containing a compound to be tested, which method comprises the steps of:

- a) providing N populations of carrier beads where the carrier beads of each population are distinguishable from the carrier beads of every other population;
  - b) dispensing each of the N populations of labelled carrier beads into one of N different reaction vessels;
  - c) dispensing each of the N samples into one of the said different reaction vessels;
  - d) providing in each of said N different reaction vessels reagents for performing an assay whereby a signal moiety is caused to be partitioned in a compound-related manner between the carrier beads in that reaction vessel and a supernatant fluid;
  - e) combining the contents of all of the reaction vessels into a mixture; and
  - f) subjecting the mixture to analysis by flow cytometry, to assay the signal moiety associated with each of a sequence of individual beads;
- wherein N is greater than or equal to 2.

The invention also provides a kit for performing the assay method, which kit comprises the N populations of the carrier beads where the carrier beads of each population are distinguishable from the carrier beads of every other population, and wherein all the beads are pre-coated with the same reagent for performing the assay, together with a supply of reagents for performing the assay, where N is at least 2.

Suitably, N is greater than or equal to 2; preferably in the range from 2 to 100,000, more preferably in the range from 80 to 4000.

Suitably, the carrier beads are coated with a reagent, bound thereto, the reagent optionally carrying a signal moiety.

Suitable assay formats which employ a reagent carrying

signal moiety bound to the carrier bead include those which, either by chemical or by enzymatic action, involve the release of a signal moiety from the bead. In the alternative, a reagent carrying the signal moiety is added in solution in a suitable medium, and include assays which involve  
5 binding the signal moiety either covalently or non-covalently, to a reagent immobilised on the bead.

Suitably, the reaction vessels form the wells of a multiwell plate.

In step d) of the method, an assay reaction is performed in  
10 which a signal moiety is caused to be partitioned in a compound related manner between carrier beads and a supernatant fluid. Various examples can be given. In one example, an assay is performed to determine the presence or absence in each sample of a particular compound to be tested; in each reaction vessel the signal moiety is partitioned in a manner  
15 which indicates the presence or the absence of the compound in the sample dispensed in that vessel. In another example, an assay is performed to determine the concentration in each sample of a particular compound to be tested; in each reaction vessel the signal moiety is partitioned in a manner which indicates the concentration of the compound  
20 in the sample dispensed in that vessel. In another example, which is preferred, an assay is performed to determine the biological activities of a plurality of different compounds to be tested, with each sample comprising or consisting of a different compound, generally in known amount; in each reaction vessel the signal moiety is partitioned in a manner which indicates  
25 the biological activity of the compound in the sample dispensed in that reaction vessel.

Beads suitable for use in the method of the invention are those which are compatible with processing and analysis by flow cytometry and additionally are suitable for incorporating means of identification into  
30 the bead. Preferred bead types are formed from plastic or polymeric

materials, including polystyrene latexes, polyacrylates, polymethylmethacrylate, polyacrylamides, polyurethane, polyvinylidene chloride and polyvinyltoluene. Polystyrene beads are particularly preferred for use in the invention. Beads may be of a mean diameter suitable for use  
5 in flow cytometric applications. A bead size suitable for use in the invention may be in the range 1-50 $\mu$ m in diameter, preferably of diameter 2-20 $\mu$ m. Preferably, beads of the same size are used in the method of the invention. Optimally, beads of mean diameter 10 $\mu$ m are used in the method of this invention.

10 Detectable labels suitable for bead identification include fluorescent molecules, absorbed or incorporated into or onto the surface of the bead. As an alternative means of distinguishing and identifying bead populations, beads of one population may be of a different size compared with beads of another population. In a further alternative, bead  
15 identification may be by electronic means, such as by the inclusion into the core of the bead of a suitable electronic tag. Detectable labels such as those described above may be used either singly or in combination to create bead populations which are uniquely identifiable.

Preferably beads including fluorescent labels are used in the  
20 method of the invention. Fluorescent labelled beads suitable for use with the invention are prepared by the incorporation of different amounts of two or more different fluorescent dyes into the body of the bead such that each combination of such fluorescent dyes defines a unique bead type. The number of possible discrete assays that can be multiplexed will be limited  
25 only by the number of bead types which it is possible to discriminate in a mixture. With current flow cytometry instrumentation, this does not pose a limitation on the utility of the procedure. Typical, modern flow cytometry instruments are capable of simultaneously measuring fluorescence at four wavelengths, together with other parameters, for example light scattering,  
30 which is a measure of the size of particles under analysis. In addition, the



dynamic range of fluorescence detection is high and fluorescence may be accurately measured over several orders of magnitude. It is therefore possible to devise schemes which yield a large number of individually distinguishable bead types to serve as carriers in a HTS assay according to the present invention. For example, beads may be prepared which contain three separate, spectrally distinguishable fluorescent dyes, wherein each fluorescent dye may be present in one of 8 concentration levels. Thus it is possible to create  $8^3$ , that is 512 spectrally distinguishable bead types. If, in addition, 3 sizes of beads are used, the total number of bead types is  $3 \times 512 = 1536$ . This number is equivalent to the number of wells in a high density multiwell plate such as are suitable for use in HTS assays. Use of fluorescent dyes in such combinations will allow all reactions in a high density plate to be combined into a single sample for analysis by flow cytometry.

Suitable fluorescent dyes useful for bead identification are dyes which have discrete excitation and emission spectra suitable for individual identification in a flow cytometer. The exact chemical nature of the fluorescent dye is not critical to the present invention. Fluorescent dyes which may be used include, but are not limited to, fluoresceins, rhodamines, cyanine dyes, coumarins, and the BODIPY groups of fluorescent dyes. Methods for electronic coding and identification of beads are disclosed in US Patent 5,641,634.

The above described bead types can be applied to assays commonly used in HTS applications. Such assays are conveniently categorised as one of two types.

i) The first category comprises equilibrium binding assays, in which one member of a binding pair (the reactant) is bound to the surface of the bead and samples containing compounds to be screened are tested for their effect upon the binding, (either antagonistic or agonistic) to a second member of the binding pair (the ligand), where the

ligand carries a signal moiety, preferably a fluorescent label. In this way, the effect of the test sample on the binding reaction can be determined by measurement of the amount of labelled ligand bound to the bead through its interaction with its binding partner. Examples of such equilibrium  
5 binding interactions include, but are not restricted to, receptor-ligand interactions, protein-protein binding interactions and protein-DNA interactions. Irrespective of the identity of the components of the interaction, all such assays are similarly characterised by having two components where one component is bound to the bead and the second  
10 component carries a signal moiety which becomes attached to the bead through the interaction of the two components.

ii) In the second category, the assay may comprise detection and measurement of a chemical or enzymatic change in the state of an assay component bound to the bead and in which the samples  
15 containing compounds to be screened are tested for their inhibitory effects, potentiation effects, agonistic, or antagonistic effects on the reaction under investigation. Illustrative of such reactions are those which include the removal of a fluorescent dye-labelled moiety from a substrate coupled directly or indirectly to the bead through a covalent or non-covalent  
20 interaction, or alternatively, the covalent or non-covalent addition of a fluorescent dye-labelled moiety from a substrate in solution in the assay medium to a molecule coupled directly or indirectly to the bead by means of a covalent or non-covalent interaction. Examples of such assays include, but are not restricted to, the cleavage of a fluorescent dye-labelled  
25 peptide or protein by a protease, the cleavage of fluorescent dye-labelled DNA or RNA molecule by a nuclease, the joining of fluorescent dye-labelled DNA or RNA molecules to other nucleic acid molecules by ligases, the addition of a fluorescent dye-labelled nucleotide to a DNA or RNA molecule by a polymerase and transfer of a fluorescent dye-labelled  
30 chemical moiety from one molecule to another by a transferase such as

acetyl transferase.

Suitable fluorescent labels for tagging ligands or substrates are those which are: a) spectrally distinct and distinguishable from any fluorescent dye used for bead identification, b) detectable by a flow  
5 cytometer and, c) capable of being attached to the ligand or substrate component of the assay by covalent or non-covalent attachment. Suitable fluorescent dyes for use in labelling ligands and substrates according to the method of the invention may be selected from the general categories of fluorescent dyes listed above. Preferably, derivatives of such fluorescent  
10 dyes having reactive or functional groups suitable for attachment to corresponding functional or reactive groups on biological target molecules are used. Examples of such reactive fluorescent dyes are sulpho-cyanine dye NHS ester derivatives as described in US Patent No.4268486 (Waggoner *et al*). Other fluorescent reagents suitable for labelling target  
15 molecules will be well known to those skilled in the art.

Alternatively, labels useful for attachment to the ligands or substrates can be fluorescence energy transfer labels. Examples of such energy transfer fluorescent dyes are to be found in GB Patent No.2301833 (Waggoner *et al*) which relates to fluorescent energy transfer complexes  
20 containing reactive or functional groups for covalent attachment to a target. Other fluorescent energy transfer labels may be bound non-covalently to a ligand or substrate moiety, e.g. by intercalation of a dye to a dsDNA molecule. Examples of such dyes are disclosed in US Patent No.5401847 (Glazer *et al*).

25 For clarity, the general principles and specific embodiments of the method according to the present invention (termed mix/multiplex HTS), are described with reference to the following figures:

**Figure 1:** Flowchart illustrating the principle of the mix/multiplex HTS process.

30 **Figure 2:** Schematic representation of the mix/multiplex HTS

process using fluorescence bead identification.

**Figure 3:** Schematic representation of the mix/multiplex HTS process using electronic bead identification.

With reference to Figure 1, to perform the mix/multiplex HTS process, sufficient individual types of carrier beads are used to allow one carrier bead type for each discrete assay to be performed in a screening unit, that is one bead type for each sample to be screened. The surfaces of beads are modified, for example by coating with a binding reagent such as an antibody, protein A, streptavidin, avidin, wheat germ agglutinin or poly-l-lysine. Alternatively the bead surface may be treated by chemical modification to provide functional or reactive groups suitable for the attachment of specific assay components such as proteins, peptides, oligonucleotides, ligands and carbohydrates to the surface of the bead. Suitable functional or reactive groups include hydroxyl, amino, carbonyl, carboxyl and sulphhydryl groups. Methods suitable for coupling reactants to the surface the bead are well known to those skilled in the art.

In a further illustration of the method of this invention, reference is made to two possible but non-restrictive embodiments of the process. With reference to Figure 2, beads containing different amounts of two fluorescent dyes are used as carrier beads for the assay. To set up the assay, each type of beads (2,3,4) is added to a separate well of a multiwell screening plate (1). Pre-dispensed plates arrayed in this manner are then used as the basis for the screening process as described generally above. Once the reaction stage of the screening process is complete, a portion, or the entire contents of each of the wells in which reactions have been conducted, are mixed together into a single container (6) and analysed by flow cytometry. In the flow cytometer, two of the available fluorescence measurement channels are used to identify the bead type to which any individual bead belongs, by determining the amounts of the two fluorescent dyes present within the bead.

Simultaneously, a third fluorescence channel may be used to quantify the amount of fluorescent dye-labelled ligand or substrate bound to the surface of the bead.

In performing assays according to the method of this invention, it is convenient to refer to a screening unit which will typically correspond to assay reactions performed in one multiwell plate, where a complete screen comprises from one to many multiwell plates. Each bead type from 1-N is individually added to corresponding wells 1-N containing assay reagents, where for example in the case of a receptor based screening assay, reagents would typically comprise a receptor preparation, assay buffer and a fluorescent labelled receptor ligand. Samples containing one or more compounds to be screened are added individually to the prepared wells, samples 1-N being added to wells 1-N. In this way, a fixed correspondence is established between each sample in the screen and the bead type carrying the reactants exposed to each individual sample containing one or more compounds under test. Once the reaction stage of the assay is complete, all reactions in a screening unit are mixed together for analysis without destroying the correspondence, since on analysis by flow cytometry, both the particular bead type and the assay signal associated with it can be readily determined for any given bead in the analysed mixture. Accordingly, once analysis of the mixed samples is complete, assay signals measured from beads 1-N (activity 1-N) can be correlated with samples 1-N originally added to wells 1-N.

Display of data as an x-y-z plot (7) allows identification of individual bead types according to the relative intensities of fluorescence from bead fluorescent dyes 1 (8) and 2 (9), on the x and y axes respectively and allows intensities of assay signals for each compound in the screen to be displayed separately (10). The identity of each bead type can be determined from its x-y position and therefore the z assay signal of that type can be assigned to a single well in the original multiwell plate.

Consequently all assay data from one mixed sample can be displayed as a data matrix (11) corresponding to the original layout of the multiwell plate and results examined to determine the activity of the compounds screened.

In a second possible embodiment of the process of the invention, electronic encoding is used to identify assay carrier beads. With reference to Figure 3, in this embodiment carrier beads containing semiconductor memory devices, as described in US Patent 5,641,634, and coated with assay reagents particular to the type of assay being performed are used in a bulk suspension (12) as described above. The bulk beads are dispensed into multiwell plates (13) using a dispensing nozzle (14) fitted with a radio-frequency generating coil (16) controlled by encoding circuitry (15). This apparatus allows beads passing through the dispensing device to be given a unique identity through action of the radio-frequency field on the semiconductor. By this means it is possible, starting with a bulk suspension of identical beads and by moving the dispensing device from well to well, to produce a multiwell plate with an uniquely coded population of beads in each well. At this stage the screening process is continued as described above with assay reagents (17) being added to the wells of the multiwell plate, followed by samples (18) containing compounds to be screened.

For analysis, a modified flow cytometer (20) is used where the instrument is fitted with a second radio-frequency coil (22) set up to read information encoded on the semiconductor within beads through decoding circuitry (21). Pooled beads (19) passing through the instrument are first read by the decoder and secondly by the instrument's conventional fluorescence detection laser (23) and photomultiplier (24) components to give a continuous data readout of bead identity code (25) and assay fluorescence signal (26).

By the use of electronic encoding as a means of bead identification, the possible number of bead types is limited only by the

capacity of the semiconductor. For example a 16 bit device would allow the characterisation of 32768 different bead types and therefore mix/multiplexing of 32768 discrete screening assay reactions. Secondly, beads may be prepared for an assay in bulk and coded directly before use, thereby removing the need to carry out preparations on each bead type individually. Radio-frequency encoding and reading removes the requirement for multiple fluorescence channels to be used for bead identification allowing either simplification of instrumentation or use of fluorescence channels to measure additional assay information.

10           The mix/multiplex procedure as described above allows very high throughput of individual screening assay reactions by analysis by flow cytometry in a manner which exploits the capabilities of flow cytometry instrumentation, and in particular the very fast data acquisition which can be obtained. The procedure is compatible with the wide range of different  
15   sized multiwell plates that are commonly used in HTS programs. The method of this invention is preferably used in high well density, small well volume, plates such as 1536 well plates, where the assay volume/well is 10 $\mu$ l or less. The amounts of beads used in each well may be varied to accommodate the requirements of different screening assays, but will  
20   preferably be in the range 0.01-10%v/v in respect of the assay volume, most preferably in the range 0.1-1.0%v/v. At the most preferred bead concentrations and using a preferred bead size of 10 $\mu$ m, a single assay well containing 10 $\mu$ l of liquid would contain a number of beads in the range 10,000-100,000 beads/well.

25           Each bead in any individual well is identical to every other bead in the same well and is therefore an individual assay unit which can be separately measured by flow cytometry. In performing biological assays, it is common practice to perform replicate measurements in order to take account of physical or biological variations inherent to the assay  
30   process. Such replicates typically take the form of duplicate or triplicate



determinations of each assay which are carried out to obtain data typically expressed as a mean  $\pm$  standard deviation, where the standard deviation is a statistical measure of the variation in the assay data which is used to assess the precision and accuracy of the data obtained. In conventional screening assays the assay comprises the whole well or tube in which the assay is performed, and therefore replication involves duplication of the entire assay. In contrast in bead based assays where each bead is an measurable unit, replicate measurements may be performed at the level of individual beads. Therefore, while an assay well may contain 10,000-100,000 beads it is not necessary in the subsequent analysis to measure every bead from that well, but only to measure sufficient beads to accumulate data which meets predetermined specifications for precision and accuracy.

The potential throughput of the process is illustrated by the following example. If a 1536 well plate is used as single screening unit, and it is determined that to obtain a statistically valid analysis it is necessary to measure assay results for 100 beads for each compound screened, the total number of beads to be analysed is 153,600. Modern flow cytometers are readily capable of performing measurements on between 1000 and 10,000 particles/second; assuming analysis at an intermediate rate of 2500 beads/second yields an analysis time of  $153,600/2500 = 61.44$  seconds or approximately 1 minute to measure the 1536 discrete assays in the multiwell plate. This compares very favourably with a time of 25.6 minutes to read results individually in a plate reader at a speed of 1 second/well. Allowing for loading of successive mixed samples on to a flow cytometer at a rate of 40/hour gives a throughput of  $1536 \times 40 = 61440$  assays/hour or around 500,000 assays in a working day.



**Example**

Streptavidin coated bead type A (yellow fluor) and bead type B (purple fluor) were pipetted into two separate wells of a microtitre plate, such that well 1 contained bead A and well 2 contained bead B. Buffer was added to well 1 and buffer containing biotin was added to well 2. Following mixing and incubation a solution of Cy-5 labelled biotin in buffer was added to both wells. Following further incubation the contents of well 1 and well 2 were combined and the mixture analysed by flow cytometry. Measurement of Cy-5 fluorescence associated with each bead type showed high fluorescence for bead B indicating high Cy-5-biotin binding in well 1 and low Cy-5-biotin binding in well 2, correlating with the presence in well 2 of an active competitor for binding to the streptavidin on the bead surface.

CLAIMS

- 5 1. A method for the assay of N samples each containing a compound to be tested, which method comprises the steps of:
- a) providing N populations of carrier beads where the carrier beads of each population are distinguishable from the carrier beads of every other population;
  - 10 b) dispensing each of the N populations of labelled carrier beads into one of N different reaction vessels;
  - c) dispensing each of the N samples into one of the said different reaction vessels;
  - d) providing in each of said N different reaction vessels reagents
  - 15 for performing an assay whereby a signal moiety is caused to be partitioned in a compound-related manner between the carrier beads in that reaction vessel and a supernatant fluid;
  - e) combining the contents of all of the reaction vessels into a mixture; and
  - 20 f) subjecting the mixture to analysis by flow cytometry, to assay the signal moiety associated with each of a sequence of individual beads; wherein N is greater than or equal to 2.
2. A method as claimed in claim 1, wherein in step a) there are
- 25 provided N populations of carrier beads where the carrier beads of one population are distinguishable by virtue of a detectable label from the carrier beads of another population.
3. A method as claimed in claim 1 or claim 2, wherein N is
- 30 80 - 100,000.

4. A method as claimed in claim 2 and claim 3, wherein in step  
f) the mixture is subjected to analysis by flow cytometry, to assay the signal  
moiety and the label associated with each of a sequence of individual  
beads, whereby the signal moiety indicates the biological activity of the  
5 compound to be tested and the label indicates the sample containing the  
compound.

5. A method as claimed in any one of claims 1 to 4, wherein N is  
from 80 to 4000.

10

6. A method as claimed in any one of claims 1 to 4, wherein the  
beads are pre-coated with a reagent for performing the assay.

7. A method as claimed in any one of claims 1 to 6, wherein a  
15 population of beads is detectably labelled by means of at least one  
fluorescent dye.

8. A method as claimed in any one of claims 1 to 6, wherein a  
population of beads is electronically labelled.

20

9. A method as claimed in any one of claims 1 to 8, wherein the  
signal moiety is a fluorescent dye.

10. A method as claimed in any one of claims 1 to 9, wherein in  
25 step d) the same reagents for performing the same assay are provided in  
each of the N different reaction vessels.

11. A kit for the assay of N samples each containing one or more compounds to be tested, which kit comprises N populations of carrier beads where the carrier beads of each population are distinguishable from the carrier beads of every other population, and wherein all the beads are pre-coated with the same reagent for performing the assay, together with a supply of reagents for performing the assay, where N is at least 2.



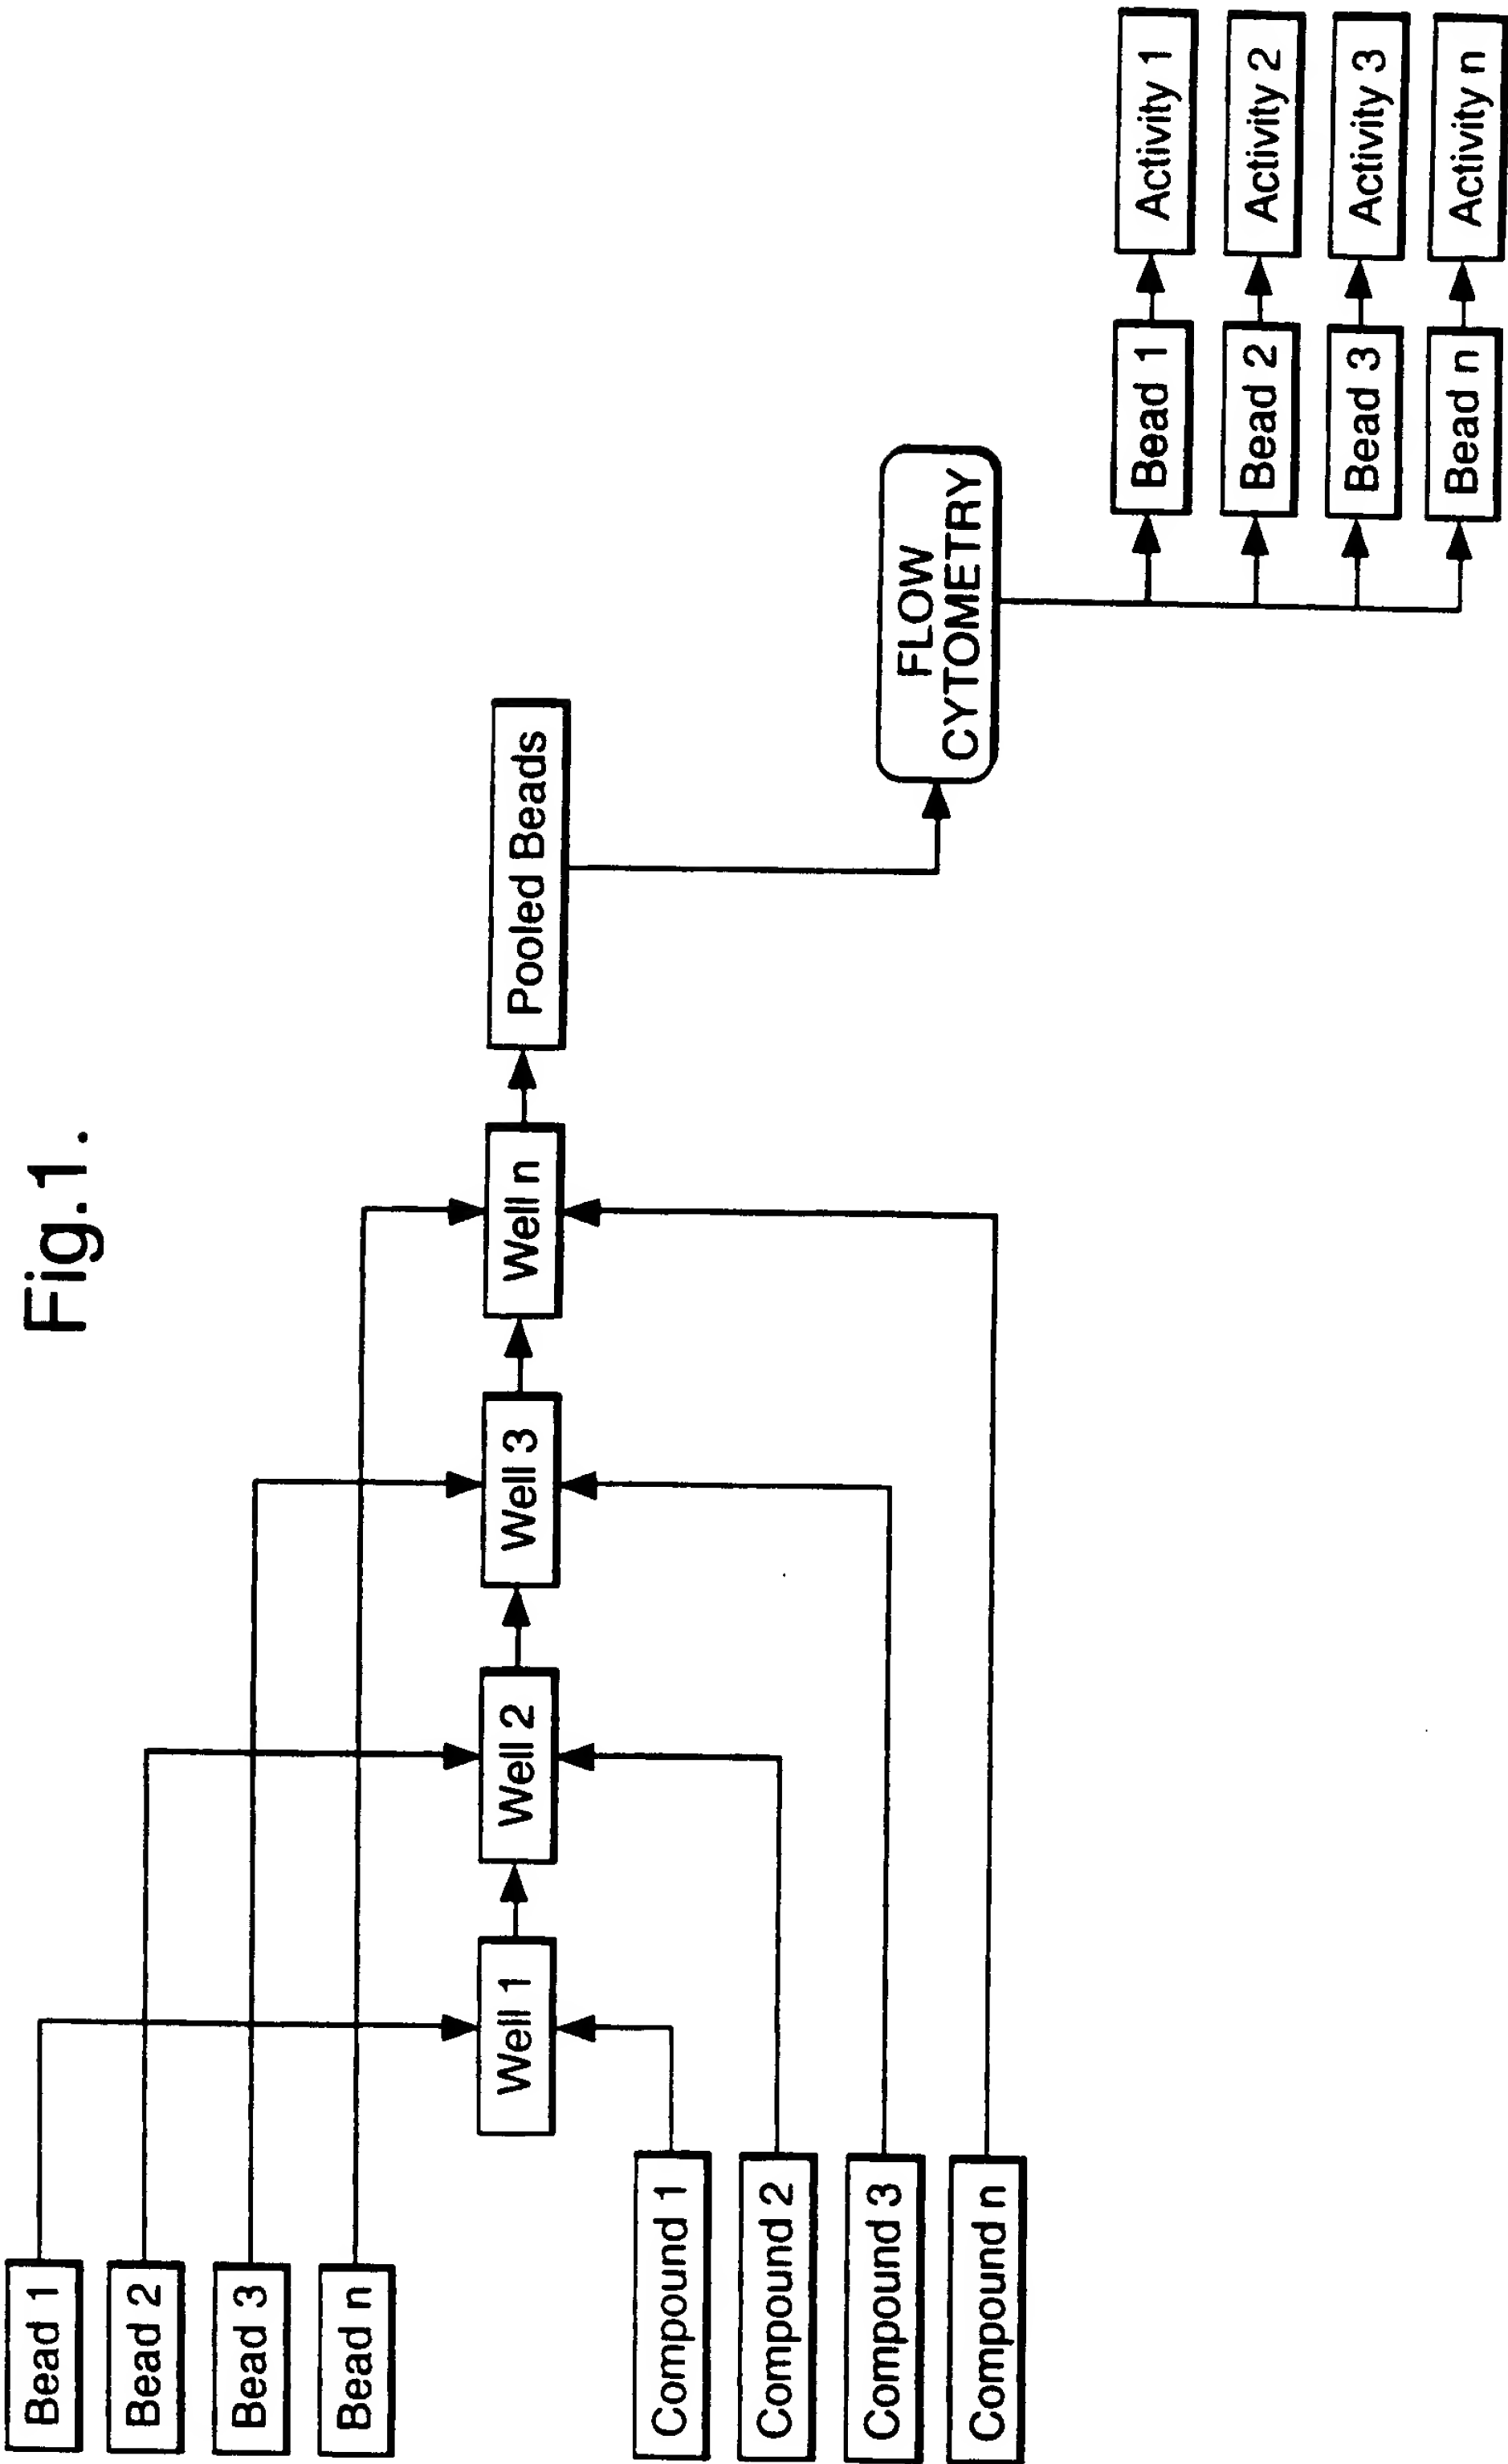


Fig.2.

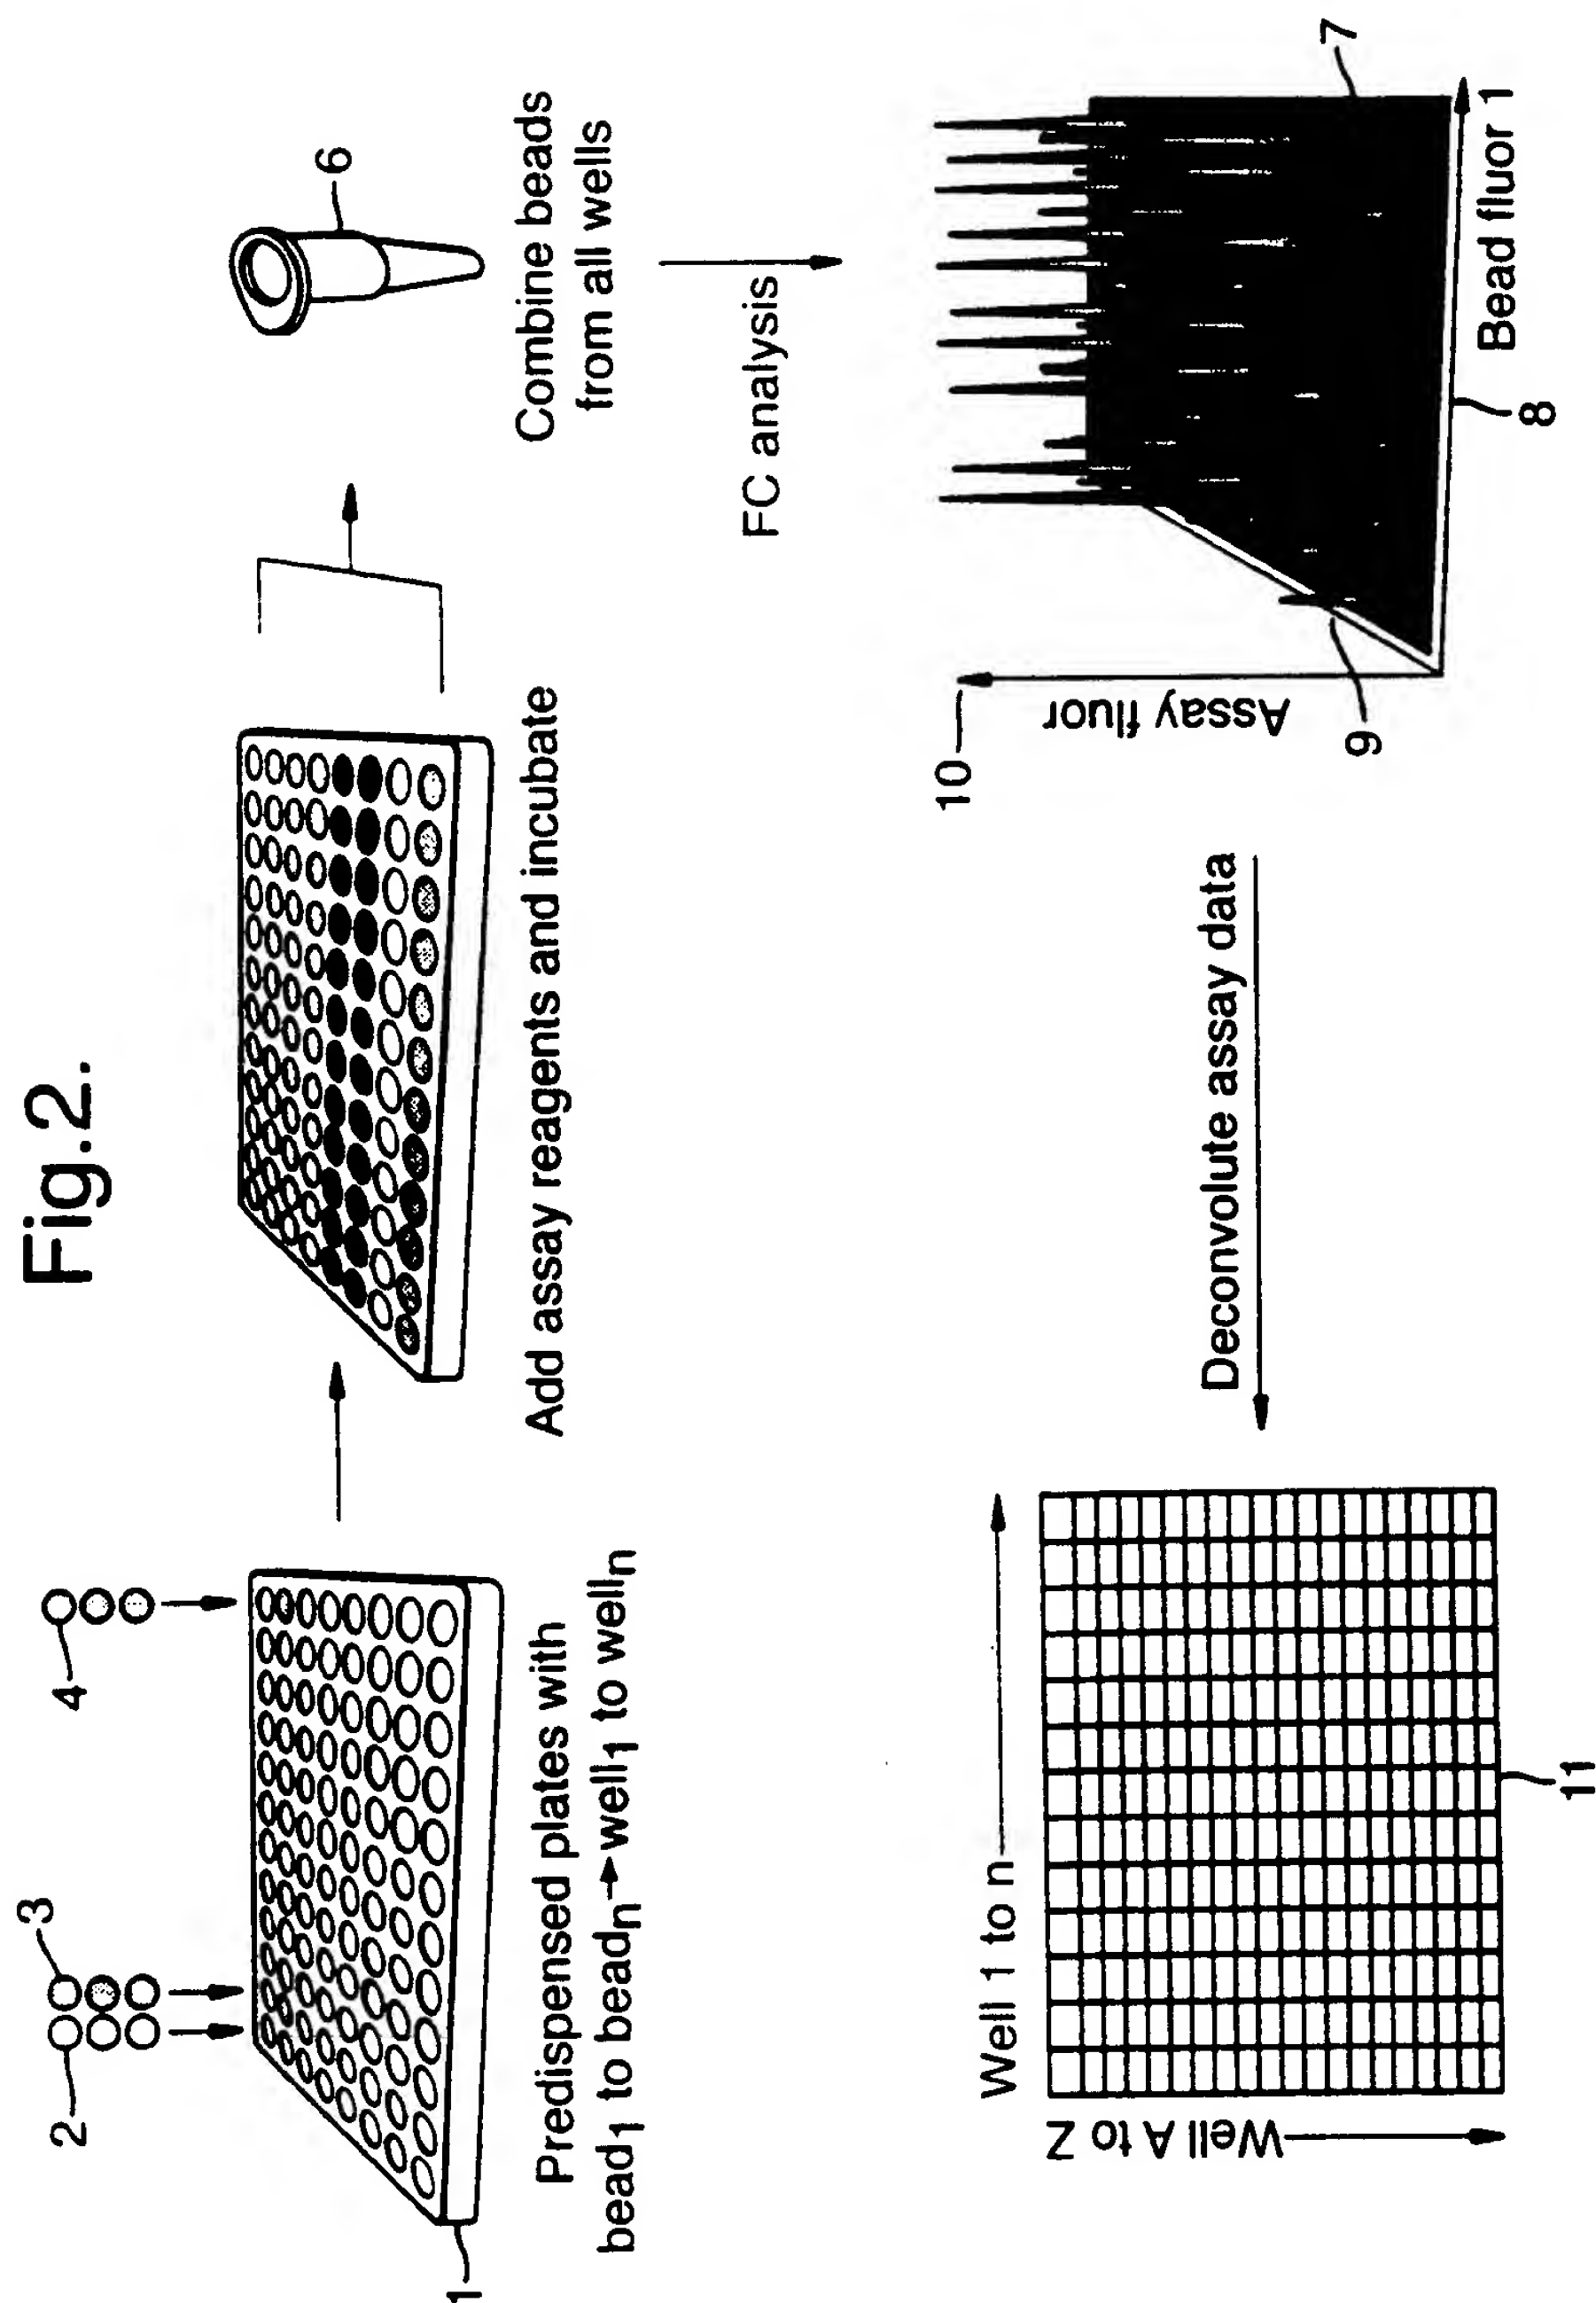

3/3

Fig.3.

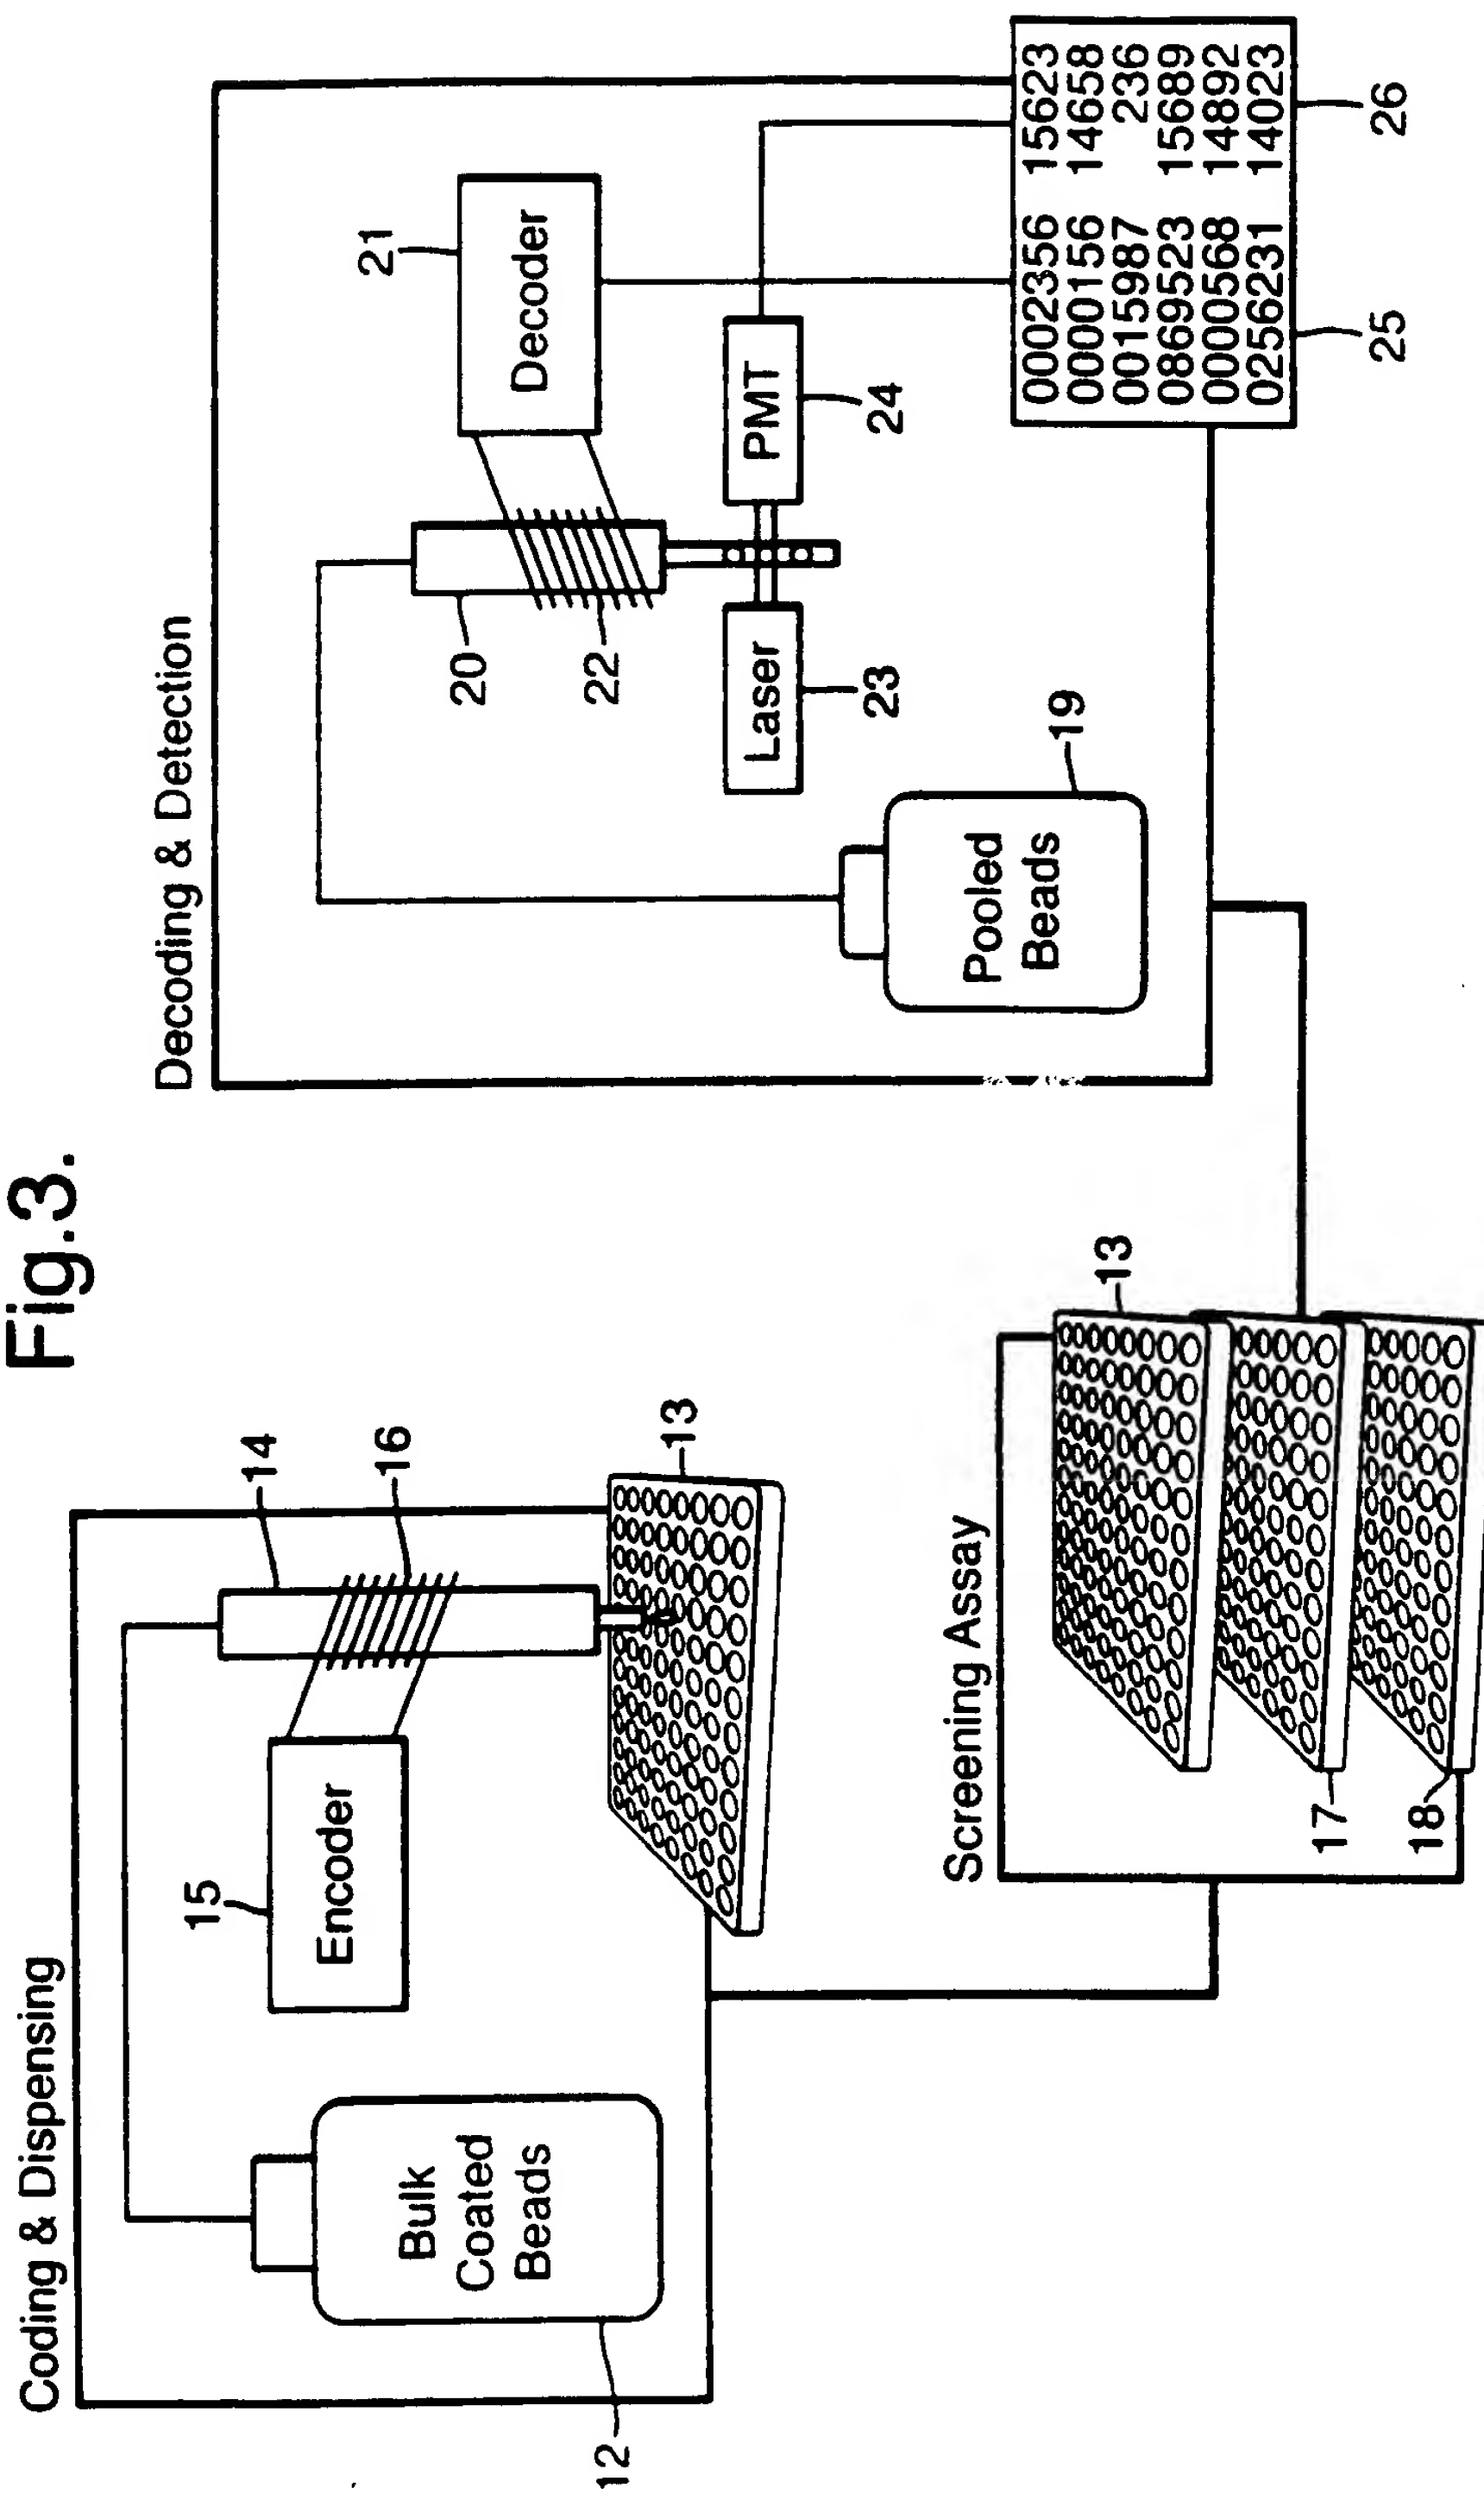

## INTERNATIONAL SEARCH REPORT

Int. . . . .ional Application No

PCT/GB 98/03727

**A. CLASSIFICATION OF SUBJECT MATTER**

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 G01N33/58 C12Q1/00 G01N33/543

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01N C07B C12Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DATABASE WPI Section Ch, Week 9410 Derwent Publications Ltd., London, GB; Class A12, AN 94-077445 XP002102174 & JP 06 027112 A (NITTO DENKO CORP.) , 4 February 1994	1-10
X	see abstract ---	11
Y	WO 93 02360 A (TRANSMED BIOTECH INC) 4 February 1993	1-10
X	see claim 10 ---	11
Y	WO 93 06121 A (AFFYMAX TECH NV) 1 April 1993	1-10
X	see figures 2.9 ---	11
	--- -/--	

☒ Further documents are listed in the continuation of box C

☒ Patent family members are listed in annex

### Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

x- document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

5: document member of the same patent family

Date of the actual completion of the international search

7 May 1999

Date of mailing of the international search report

19/05/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040. Tx 31 651 epo nl.  
Fax (+31-70) 340-3016

Authorized officer

Griffith, G



# INTERNATIONAL SEARCH REPORT

Inte. onal Application No

PCT/GB 98/03727

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication where appropriate, of the relevant passages	Relevant to claim No
Y	WO 95 32425 A (SMITHKLINE BEECHAM CORP ;YAMASHITA DENNIS SHINJI (US); WEINSTOCK J) 30 November 1995	1-10
X	see page 22 - page 27 ---	11
Y	WO 97 14028 A (LUMINEX CORP ;CHANDLER VAN S (US); FULTON R JERROLD (US); CHANDLER) 17 April 1997	1-10
X	see page 7, line 1 - page 8, line 23 see figures 16A-C ---	11
Y	US 5 641 634 A (MANDECKI WLODEK) 24 June 1997 cited in the application	1-10
X	see example 3 ---	11
A	WO 95 13538 A (OPERON TECHNOLOGIES INC) 18 May 1995 see the whole document -----	1-11

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/03727


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9302360 A	04-02-1993	AT 171543 T	15-10-1998
		AU 2348092 A	23-02-1993
		CA 2113350 A,C	04-02-1993
		DE 69227112 D	29-10-1998
		EP 0594763 A	04-05-1994
		JP 6509417 T	20-10-1994
		US 5567627 A	22-10-1996
WO 9306121 A	01-04-1993	AT 148889 T	15-02-1997
		AU 669489 B	13-06-1996
		AU 2661992 A	27-04-1993
		CA 2118806 A	01-04-1993
		DE 69217497 D	27-03-1997
		DE 69217497 T	12-06-1997
		DK 604552 T	04-08-1997
		EP 0604552 A	06-07-1994
		EP 0773227 A	14-05-1997
		ES 2097925 T	16-04-1997
		GR 3023156 T	30-07-1997
		US 5639603 A	17-06-1997
		US 5789162 A	04-08-1998
		US 5708153 A	13-01-1998
		US 5770358 A	23-06-1998
WO 9532425 A	30-11-1995	EP 0763202 A	19-03-1997
		JP 10500951 T	27-01-1998
WO 9714028 A	17-04-1997	US 5736330 A	07-04-1998
		AU 7398996 A	30-04-1997
		CA 2227895 A	17-04-1997
		EP 0852004 A	08-07-1998
US 5641634 A	24-06-1997	AU 1141597 A	19-06-1997
		CA 2238696 A	05-06-1997
		EP 0871777 A	21-10-1998
		WO 9720074 A	05-06-1997
WO 9513538 A	18-05-1995	NONE	



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G01N 33/58, C12Q 1/00, G01N 33/543</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/64867</b> (43) International Publication Date: 16 December 1999 (16.12.99)
(21) International Application Number: PCT/GB98/03727 (22) International Filing Date: 3 December 1998 (03.12.98) (30) Priority Data: 97309784.3 4 December 1997 (04.12.97) EP (71) Applicant (for all designated States except US): AMERSHAM PHARMACIA BIOTECH UK LIMITED [GB/GB]; Amer- sham Place, Little Chalfont, Buckinghamshire HP7 9NA (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): THOMAS, Nicholas [GB/GB]; 12 Mapletree Close, Radyr, Cardiff, South Glamorgan CF4 8RU (GB). (74) Agents: PENNANT, Pyers et al.; Stevens Hewlett & Perkins, 1 Serjeants' Inn, Fleet Street, London EC4Y 1LL (GB).		(81) Designated States: CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published With international search report.

## (54) Title: MULTIPLE ASSAY METHOD

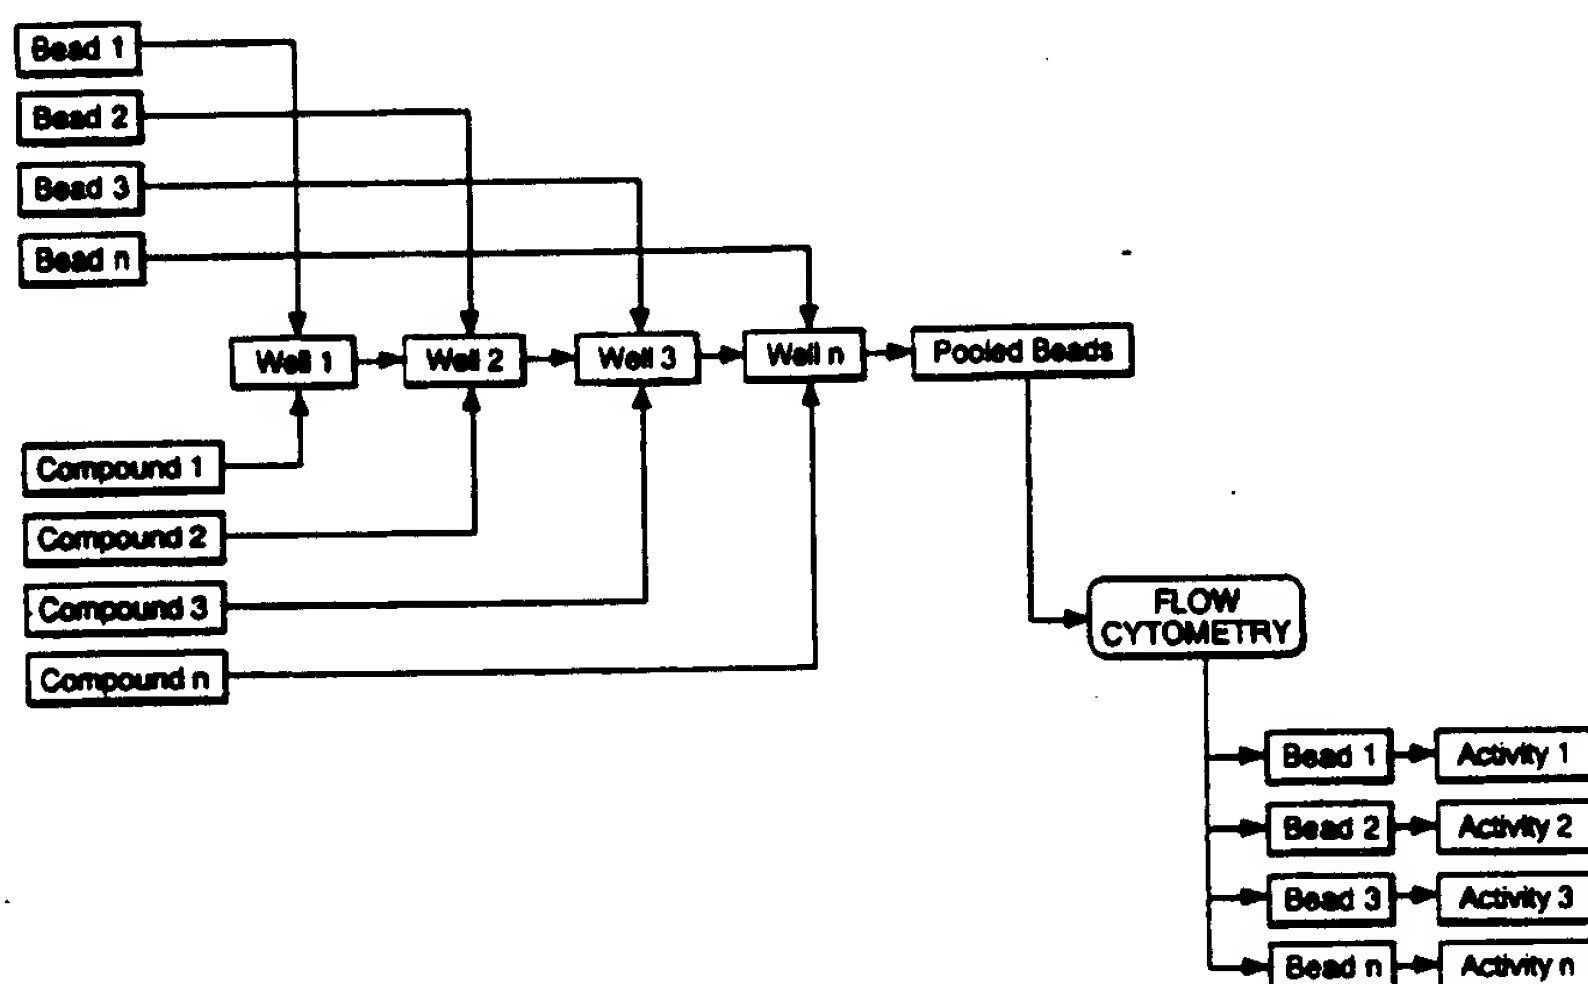

## (57) Abstract

A method for the assay of N samples each containing a compound to be tested, comprises providing N reaction vessels each containing a population of carrier beads and other reagents for performing the assay, where N is at least 2 e.g. 80-4000. Each population of carrier beads is distinguishable from every other population. After adding the samples to the reaction vessels and performing the assays, the contents of all the reaction vessels are mixed and subjected to analysis by flow cytometry. By means of flow cytometry, each carrier bead is rapidly analysed to identify its population and also to determine the presence or concentration or biological activity of the compound to be tested.

\*(Referred to in PCT Gazette No 30/2000, Section II)

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauntania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						